



Specification

- FOR BS EN 1092-2 (BS4504) PN10 / PN16 FLANGE MOUNTING
- FACE-TO-FACE DIMENSION TO ISO 5752 / BS 5155 / BS EN 593
- DOUBLE-STAGE WORM GEAR OPERATOR


Pressure / Temperature Ratings

Working Pressure	16 bar
Testing Pressure	Shell: 1.5 times Seat: 1.1 times
Working Temperature	-20°C to 110°C (EPDM Seat) -10°C to 80°C (NBR Seat) 5°C to 120°C (PTFE seat) -10°C to 135°C (VITON seat)
Suitable Media	Water & Oil

Dimensions

Size mm	A mm	B mm	E mm	F mm	G mm
400	102	307	676	251	280
450	114	336	702	251	280
500	127	373	733	251	280
600	154	429	877	300	385

Structure

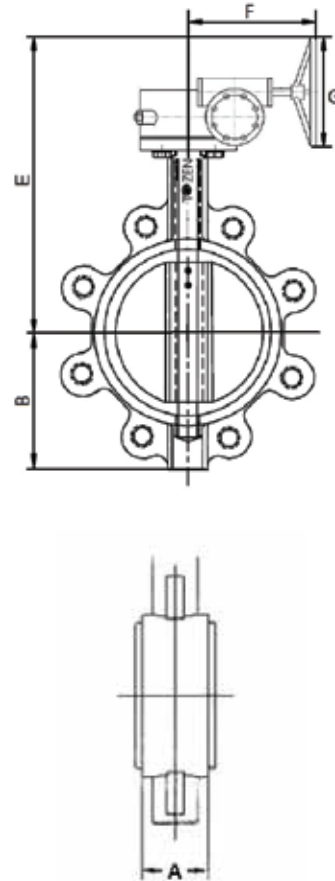

Note:

1. Actuator mounting flange conforms to ISO 5211 drilling.
2. The butterfly valve can be supplied with electric actuator.
3. Micro switch / limit switch box are available upon request.
4. Others flange standard available upon request.
5. Design and specifications are subject to change with out prior notice.